
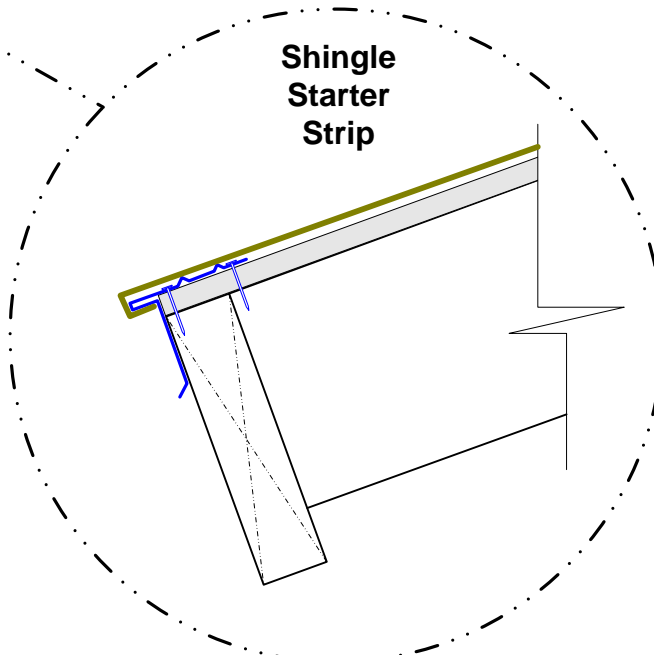


STARTER – EAVE Detail

Metro Shingle STARTER Metal

(CONCEALED Fastened Panel - MetroSHINGLE®)

Panels **DIRECT** to DECK

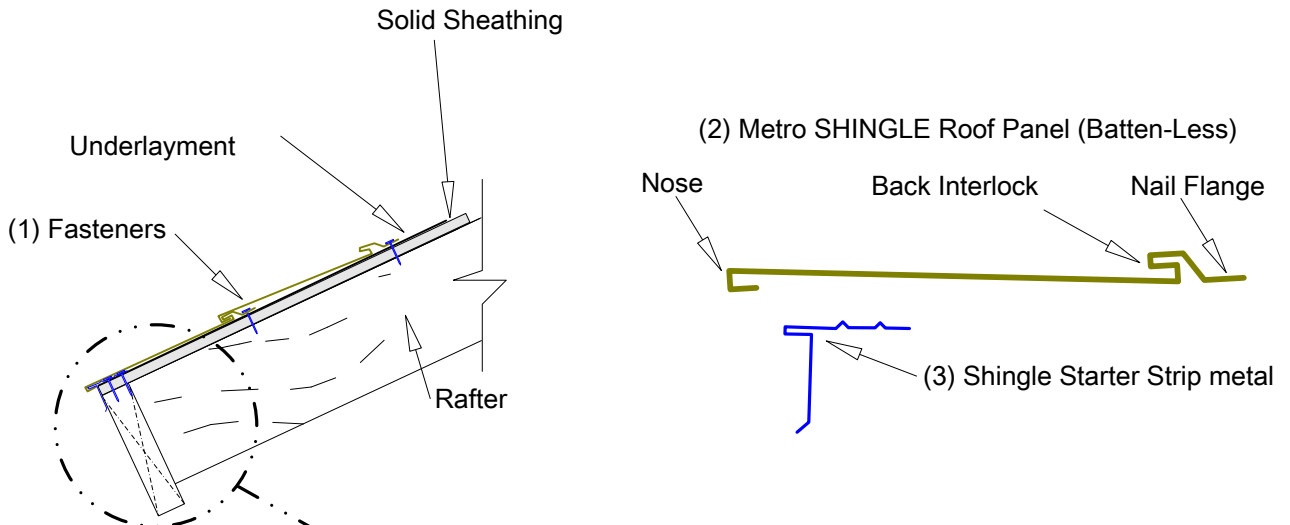

GENERAL:

Metro Shingle panels are a 'Concealed Fastened' type panel and use a 'Starter Strip' metal (D-Edge) along the fascia as shown. Install info is for standard installs up to 120-mph wind areas, for HVHZ wind areas refer to Metro HVHZ install details. (High Velocity Hurricane Zone).

(1) FASTENERS:

All exposed fasteners shall be a min of 1,000-hr Salt Spray corrosion resistant to ASTM-B-117. Shingle NAILS – (1-3/8" X .125" dia) Ring Shank w/3/8" Dia., head. SCREWS - #10 X 2" Hex Head (No washer) sharp pt. wood grip type colored to match panel. Shingle panels are concealed fastened.

(2) METRO SHINGLE PANELS:

Metro Shingle is a concealed fastened panel. Each panel has a built-in fastening flange as shown. The panel at the fascia hook onto the Starter Strip metal as shown and is fastened through the back flange in four (4) locations.

(3) STARTER STRIP METAL:

This metal is pre-painted to match the structure trim boards and incorporates a drip edge into its design. In some areas its called a 'D-Edge'. The 'Hook' portion extends off of the fascia by 3/4" of an inch to ensure correct weather protection at the fascia. The Rake Drip-Edge intersects with this metal at the Fascia – Rake corner.

| | | |
|----------|---------------------------------------|--|
| FILENAME | 002CO-SHINGLE-STARTER-EAVE-DETAIL.VSD | Metro Roof Products 3093 'A' Industry St., Oceanside CA USA 92054 www.metroroofs.com |
| DATE | 3-13-06 | |
| | | REVISED 9/26/2014 |