


# ROOF-to-HEADWALL Detail

## Metro COUNTER Flashing

**(EXPOSED Fastened Panels - MetroSHAKE®, MetroTILE®, MetroROMAN® & MetroCOTTAGE™ Shingle)**

Panels **DIRECT** to DECK

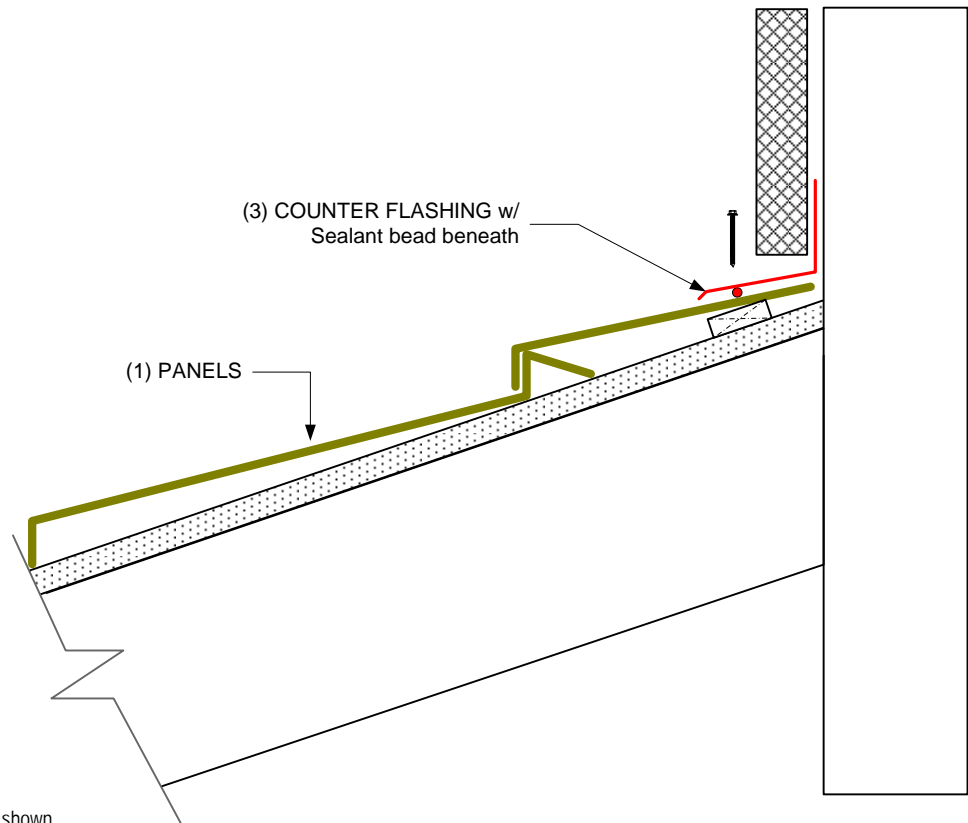

**GENERAL:**

Metro panel is cut to Head-Wall as shown.

**(1) PANELS:** Metro panels installed directly onto the rood deck as shown. Normal installs use four (4) fasteners in the back flange and four (4) in the front down-turn nose of each panel. For High Wind (HVHZ) areas, FIELD, PERIMETER & CORNER panels are fastened with six (6) in the back flange and six (6) in the front down-turn nose per panel.

**(2) FASTENERS:** All fasteners to be a minimum of 1,000hr Corrosion Resistant. Panels & Accessories fastened with #10 X 2-inch Hex Head Screw or 2-3/8-inch X .131-inch Dia. Ring Shank Black nails.

**(3) METRO Stone-Coated COUNTER Flashing.** installed up under siding as shown & fastened through sealant bead. Exterior building paper & Siding material is flashed over Counter flashing. A bead of Roofing sealant is applied across cut panel and Metro Counter flashing installed & fastened as shown.

FILENAME	
005EX-ROOF-TO-HEADWALL-METRO-COUNTER-FLASHING.VSD	
DATE	REVISD
12-28-07	9/26/2014

**Metro Roof Products**  
 3093 'A' Industry St., Oceanside  
 CA USA 92054  
[www.metroroofs.com](http://www.metroroofs.com)