


# RIDGE Detail CONTINUOUS RIDGE VENT

**(CONCEALED Fastened Panel - MetroSHINGLE®)**

Panels **DIRECT** to DECK

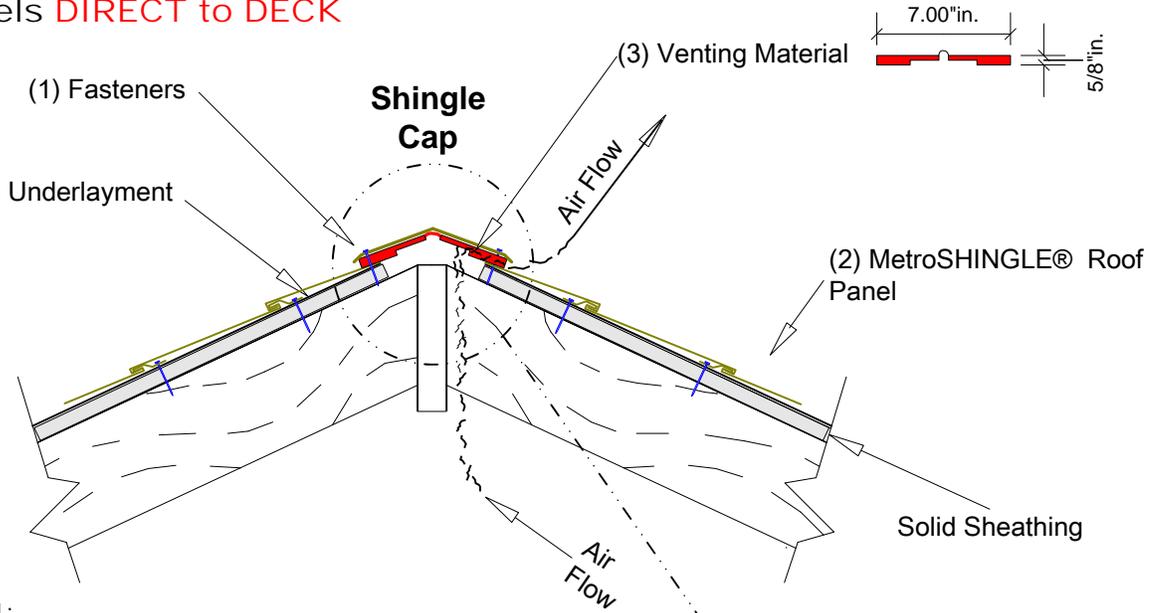

**GENERAL:**

Shingle Trim Caps can be used as shown. Install info is for standard installs up to 120-mph wind areas, for HVHZ wind areas refer to Metro HVHZ install details. (High Velocity Hurricane Zone).

**(1) FASTENERS:**

All fasteners shall be a min of 1,000-hr Salt Spray corrosion resistant to ASTM-B-117. NAILS – 8-d (2-3/8" X .131" dia) Ring Shank w/ Super Black coating. SCREWS - #10 X 2" Hex Head (No washer) sharp pt. wood grip type colored to match panel.


**(2) METRO SHINGLE PANELS:**

MetroSHINGLE® is a concealed fastened panel. Each panel has a built-in fastening flange as shown above. Trim the last panel at the ridge so the ridge slot for venting is open on both sides of the ridge board.

**(3) VENTING MATERIAL:**

Trimline™ rolled or strip rigid 5/8" inch thick corrugated plastic venting (PN# Roll 58786 or Strip 59089) is fastened on top of the MetroSHINGLE® at the ridge as shown. Embed the Vent material in a bead of sealant then fasten as shown to ensure a watertight seal. A 1" inch wide slot shall be cut along the ridge board on each side to allow for ventilation exhaust. Code requires the net free ventilating area (NFVA) to be not less than 1 to 150 of the area of the space ventilated. Proper ventilation includes sharing the open vented space between the eave & ridge of a building.

**Trimline™ Roll Ridge Vent PN #58786 = 7" Wide X 5/8" Thick X 20 ft. Long. Or Strip Vent PN #59089 = 7" Wide X 5/8" Thick X 4 ft. Long. Each lineal foot on either side of the ridge board provides 12.7 Sq. Inches of NFVA per lineal foot.**

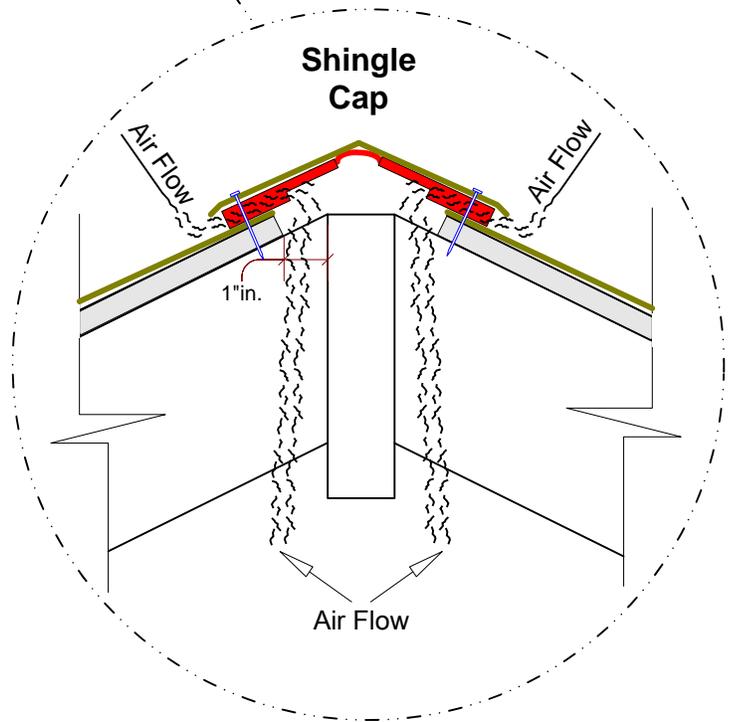

FILENAME	010CO-SHINGLE-CONTINUOS-RIDGE-VENT-SHONGE CAP.VSD	
DATE	3-13-06	REVISED 9/26/2014

**Metro Roof Products**  
3093 'A' Industry St., Oceanside  
CA USA 92054  
[www.metroroofs.com](http://www.metroroofs.com)