

90 MPH

EXPOSURE: 'C'

HEIGHT: 30 ft (Mean)

WIND RESISTANCE ASSEMBLY

Speed: 90 MPH.
Building Height: 30-FT.
Exposure: 'C'

FIELD (1)
-17.6 PSF

EDGE (2)
-33.2 PSF

CORNER (3)
-50.7 PSF

Metro Roof Products
3093 'A' Industry Street
Oceanside CA 92054
PH 760-435-9842
www.smartroofs.com

Panels DIRECT to DECK

DESIGN CRITERIA:

The design criteria for uplift resistance pressures for a mean roof height as noted, is developed using ASCE 7.05. Minimum Design Wind Uplift Pressures in PSF for FIELD (P(1), EDGE (P(2), and CORNER (P(3) for Exposure 'B' Buildings with a Mean Roof Height as specified.

ROOF WIND ZONE: (1) 'FIELD' Uplift Req., = -17.6 PSF (UL TGIK R19204 Uplift Resistance -#3,-95.00 psf)

DECKING Min., 19/32" in. thick, Grade B-C APA rated Plywood or equal. Each course must have continual support across roof at the back-lip of each panel..

BATTENS N/A

* PANELS Panels attached with Five (5) 8d (Penny) X 1-3/4 inch Ring-Shank Nails through the front downturn nose of each panel.

ROOF WIND ZONE: (2) 'EDGE' Uplift Req., = -33.2 PSF (UL TGIK R19204 Uplift Resistance -#3,-95.00 psf)

DECKING (See ZONE (1) above)

BATTENS N/A

* PANELS (See ZONE (1) above)

ROOF WIND ZONE: (3) 'CORNER' Uplift Req., = -50.7 PSF (UL TGIK R19204 Uplift Resistance -#14,-307.00 psf)

DECKING (See ZONE (1) above)

BATTENS N/A


* PANELS Panels attached with Six (6) #10 X 2-inch long 1/4-inch hex head screws through the front downturn nose and Six (6) #10 X 2-inch long 1/4-inch hex head screws through the back shelf of each panel.

*** CAUTION** 

Metro recommends its 'Batten-Less' ROMAN Tile be installed with #10 X 2-1/2" inch long hex headed screws or .131" Dia X 2-3/8" Ring Shank nails across the front down turned nose.

Metro SHAKE panel shown, fastener location similar on other panels.

ZONES 1, & 2 (FIELD & EDGE) – panels fastened with Five (5) fasteners across the panel front nose. (see Zone-3 for fastening pattern - CORNER).

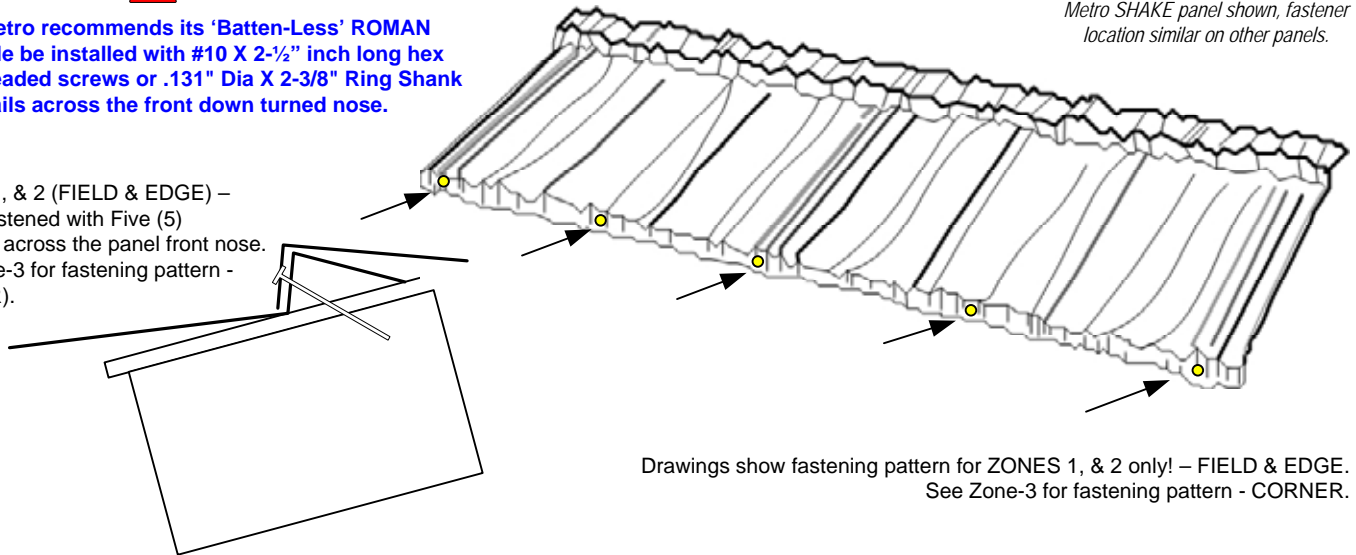

Drawings show fastening pattern for ZONES 1, & 2 only! – FIELD & EDGE. See Zone-3 for fastening pattern - CORNER.

(Metro provided fasteners may be used as follows for panel fastening:
Screws - #10 X 2-inch long Hex Head Nails - .131" Dia X 2 inch long Ring Shank)

Roofs have designated ROOF WIND ZONES identified as FIELD (P(1), EDGE (P(2), or CORNER (P(3). ASCE 7.05 Uses 3-Sec gust calculation formulas.